



50AH 48V Telecom Power System Cooper Solar Battery Backup Power System

Our Product Introduction


Basic Information

- Place of Origin: China
- Brand Name: Qiyuan
- Certification: CE, IEC, MSDS, UN38.3
- Model Number: TJZ51.2-50B
- Minimum Order Quantity: 10
- Price: USD/CNY, Unit
- Packaging Details: Carton packing
- Delivery Time: 1-2 months
- Supply Ability: 500 set per month



Product Specification

- Usage: Telecom, emergency
- Maintenance Type: Maintenance-free
- Voltage: 51.2v
- Nominal Capacity: 50AH
- Warranty: 3 Years
- Color: Black, Grey
- Application: Telecom / Energy Storage / Electrical System
- Terminal: Cooper
- Product Name: Best Popular 48v 100ah FT Telecom Battery Systems
- Design Life: 8-10 Years
- Oem Order: Acceptable
- Highlight: **48V Telecom Power System, 50ah solar battery backup, cooper solar battery backup**

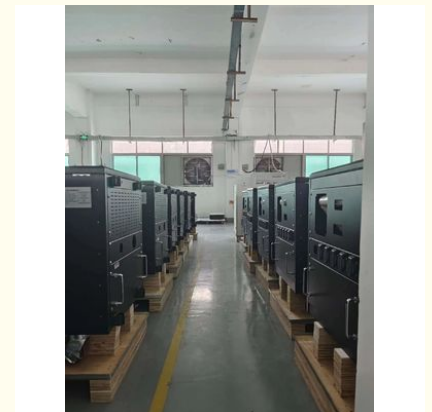

for more products please visit us on batteriesback-up.com

Product Description

Applicable to all kinds of telecommunication stations;
 Use high stability lithium iron phosphate batteries, passed CE, UL certification, safe and reliable;
 With voltage, current, temperature detection and protection function and short circuit protection function, as well as the meter function;
 Wide working temperature range, the discharge temperature range can reach to 20 °C to 50 °C;
 On-site sleep and wake up, and remote communication wake up function;
 LCD and LED display functions available;
 Dry contact, auxiliary contact detection function;
 Charging current limit and pre-charge functions, capable of parallel with multiple units (compatible with old & new batteries), can be customized to parallel with lead-acid batteries;

Model	TJZ51.2-100	TJZ51.2-50	TJZ51.2-100H	TJZ48-100H
Capacity WH	5120	2560	5120	4800
Rated voltage V	51.2		51.2	48
Charging current A	100	50	100	100
Charging current limit A	10/20	5/10	10/20	10/20
Discharging current A	100	50	100	100
Max discharging current A 3min	120	60	120	120
Charging voltage V	57.6	57.6	57.6	54
Protection voltage V	40	40	40	37.5
Display	LED(LCD optional)			
Cooling	Natural air			
Protection level	IP40			
Relative humidity	0~95%			
Working temperature	Charge 0~45°C, discharge -20~50°C			
CAN	Configurable			
RS485	Configurable			
Noise	0dB			
Parallel application	Support			
Structure	Rack design			
Dimension mm	482*420*132	482*380*132	482*420*132	482*420*132



Ningbo Qiyuan New Energy Co., Ltd

☎ 18858073356

✉ tony@qygen.com

🌐 batteriesback-up.com